


NAME	RISING SAMBU	KEEL LAID	2018-05-17
CALL SIGN	D7TR	LAUNCHED	2018-08-10
FLAG	KOREA	DELIVERED	2018-12-06
PORT OF REGISTRY	BUSAN	SHIPYARD	DAESUN SHIPBUILDING
OFFICIAL NUMBER	BSR-180037		&ENGINEERING CO.,LTD
IMO NUMBER	9819442	OWNERS	SAMBU SHIPPING CO.,LTD
CLASS SOCIETY	KR	OPERATORS	SAMBU SHIPPING CO.,LTD
CLASS NOTATION	+KRS1-OIL&CHEMICAL TANKER(DOUBLE HULL)(EXP)ESP(FBC) /PRODUCT/II, 2G / 1.6SG(IBC) CLEAN1 PSPC L1 +KRM1-BWT VEC1		
P&I CLUB	JAPAN P&I CLUB		

PRINCIPAL DIMENSIONS	
LOA	91.44M
LBP	84.0M
BREADTH	14.4M
DEPTH	7.80M
HEIGHT	28.93M
BRIDGE FRONT-BOW	65.54M
BRIDGE FRONT-STERN	25.9M
BRIDGE FRONT-MFOLD	27.17M
TONNAGE	
NET	1184
GROSS	2993

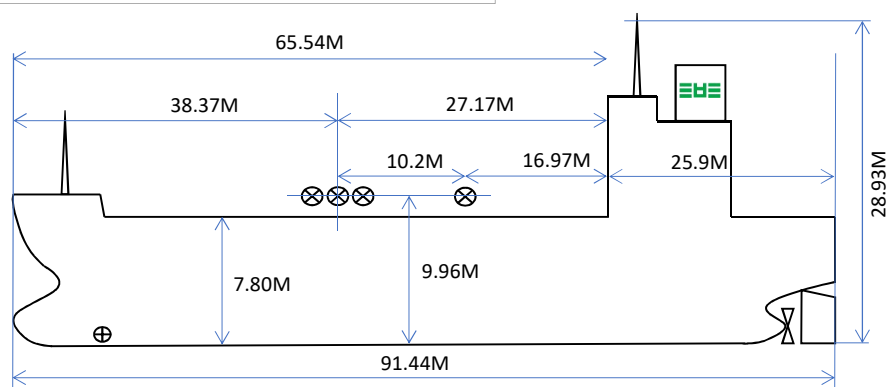

LOAD LINE INFORMATION			
	FREEBOARD	DRAFT	DWT
TROPICAL	1.840 M	5.984 M	3612.22 MT
SUMMER	1.962 M	5.862 M	3477.38 MT
WINTER	2.084 M	5.740 M	3344.48 MT
SEG.BALLAST COND'N	3.838 M	3.986 M	1532.49 MT
LIGHT SHIP		2.385 M	
TPC@SUMMER DRAFT		11.0 T	
OTHER DETAILS			
H.LEVEL ALARM / 95%		OVERFILL ALARM / 98%	

TANK CAPACITIES(M³)					
CARGO TANK(98%)		F.W TANKS(100%)		BALLAST TKS(100%)	
1C	446.810	FWT(P)	50.32	FPT	88.10
2P/S	922.152	FWT(S)	54.38	WBT 1P/S	215.34
3P/S	961.113	CWT	119.41	WBT 2P/S	223.22
4P/S	961.494	TOTAL	224.11	WBT 3P/S	219.17
5P/S	776.771			WBT 4P/S	259.94
SLOP-C	146.788			WBT 5P/S	241.37
TOTAL	4215.128			WBT 6P/S	220.43
				WBT 7P/S	305.97
				TOTAL	1773.54

MACHINERY / PROPELLER			
MAIN ENGINE	HANSHIN / LH41L		
M.C.R	3300HP(2427kW) x 225rpm		
AUX. BOILER	MIURA / HB-05 / 5000KG/H		
GENERATOR	YANMAR / 6N165L-EW / 500kW / 3SETS		
EM'CY G/N	N/A		
PROPELLER	FPP / 4BLADES / 3.20m		
STEERING GEAR	SAMBU IND.LTD / 165KG/CM2 / 1SET		
BOW THRUSTER	343BHP / 250kW		
CARGO AND BALLAST PUMPING SYSTEM			
MAIN PUMPS	NO	CAPACITY	HEAD
CARGO FRAMO	9	200M3/H	110
CARGO FRAMO	1	100M3/H	110
BALLAST FRAMO	2	300M3/H	25
TANK CLN FRAMC	1	80M3/H	
CARGO HOSE CRANES			
1 SET X 0.9T			
IG / VAPOUR EMISSION / VENTING			
IG BLOWER CAPACITY	N/A		
P/V VALVE PR. / VAC. SETTING	+0.21kg/cm ² / -0.035kg/cm ²		

BUNKER TANKS(M³)	
HFO.T(P)	74.05
HFO.T(S)	86.00
HFO SETT.T(P)	6.92
NO1 HFO SERV(P)	7.78
NO2 HFO SERV(P)	7.78
SUB.TTL	182.53
MDO.T(P)	27.69
MDO.T(S)	29.52
MDO SETT(S)	4.28
NO1 MDO SERV(S)	3.88
NO2 MDO SERV(S)	3.82
SUB.TTL	69.19

LIFE BOATS	
2 X 16PERSONS	
ENCLOAED TYPE	

WINCHES / WINDLASS / ROPES / EMERGENCY TOWING			
	FWD /	AFT	PARTICULARS
WINCHES	2	/ 2	
ROPE	4+2	/ 4+2	200M
WINCH BHC	6	/ 4	26TONS
WINDLASS	4	/ 4	
FIRE WIRE	2	/ 2	
ANCHOR	2	/ -	STBD 8 / PORT 9
EM'CY TOWING	YES	/ YES	ANCHOR CHAIN : 42mm
MANIFOLD ARRANGEMENT(mm)			
DIST. OF MANIFOLD TO MANIFOLD			2400
DIST. OF SHIPS RAIL TO MANIFOLD			2656
DIST. OF TOP OF RAIL TO CENTER MANIFOLD			850
DIST. OF MANIFOLD TO SHIP SIDE			2766
DIST. OF MAIN DECK TO CENTER MANIFOLD			2240
FIRE FIGHTING SYSTEM			
E/R	CO2, WATER MIST		
PUMP ROOM	N/A		
CARGO / DK AREA	FOAM		